

P/N 560E12/26

Fixed hose reel with electric motorisation 12 V DC in painted steel s. 560, for hot water, 150 bar, without hose. Inlet-outlet G 1/2" (f)

SECTORS OF USE


Agriculture, Automotive, Building and road construction, Industry, Mining, Lube trucks and transports

FEATURES

Pressure	150 bar
Compatible fluids	water max 130 °C
Swivel joint	AISI 304 stainless steel
Seals	Viton®
Characteristic	electric 12 V DC
Material	painted steel
Couplings	-
Hose	-
ø e hose length	-
Inlet	G 1/2" (f)
Outlet	G 1/2" (f)
Reel flow path	AISI 304 stainless steel - zinc plated steel



OVERALL DIMENSIONS (mm)

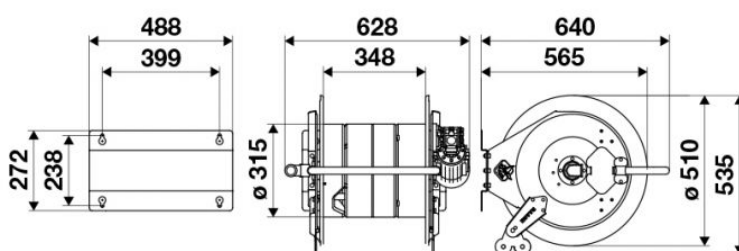

FURTHER FEATURES

Capacity 1/4"	Capacity 3/8"	Capacity 1/2"
180 m	120 m	90 m